


• D1SX Series 2.0*1.6 OSC

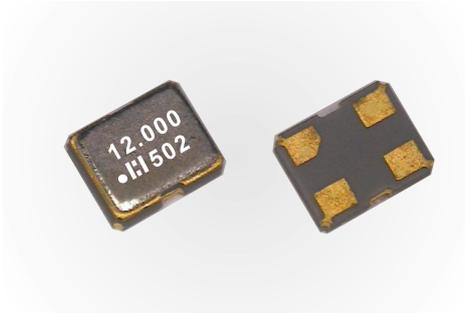

FEATURES


- 2.0X1.6X0.8 Miniature Package
- Tri-State Enable/Disable
- TTL/CMOS compatible
- Home security devices, power saving application, and low frequency specification circuit design looking for a smaller package
- 3.3V, 2.8V(2.5V), 1.8V option

Electrical Specifications

Parameter	Condition	DISX			
Frequency Range	F ₀	1~60MHz			
Frequency Stability*	All Condition*	±25ppm, ±50ppm, ±100ppm			
Operating Temperature Range	T _{OPR}	-20°C~+70°C(-40°C~+85°C option)			
Storage Temperature Range	T _{STG}	-55°C~+125°C			
Power supply Voltage	V _{DD}	3.3V+/-10%	2.8V+/-10%	1.8V+/-10%	
Supply Current	I _{DD}	1.000MHz to 9.999MHz	8mA Max	7mA Max	6mA Max
		10.000MHz to 34.999MHz	10mA Max	8mA Max	7mA Max
		35.000MHz to 49.999MHz	25mA Max	20mA Max	15mA Max
		50.000MHz to 54.000MHz	35mA Max	30mA Max	25mA Max
Output Symmetry	Sym	At 1/2V _{DD} 40/60%(45/55% Option)			
Rise time	T _r	10%V _{DD} ~90%V _{DD}	5 nS Max	6 nS Max	7 nS Max
Fall Time	T _f	90%V _{DD} ~10%V _{DD}	5 nS Max	6 nS Max	7 nS Max
Output Voltage	V _{OH}	90% V _{DD} Min			
	V _{OL}	10% V _{DD} Max			
Output Load	HCMOS Load	15pF Typ.			
Start Time	T _s	10mS Max			
Stand-by Function		Yes			
Aging(First Year)		25°C ±3°C	±2ppm Max		
Pin 1,tri-state function		Pin 1=H or open....Output active at pin 3			
		Pin 1=L.....high impedance at pin 3			

*Include: 25°C tolerance, operating temperature range, input voltage change, aging, load change, shock and vibration

Mechanical Dimensions(mm)

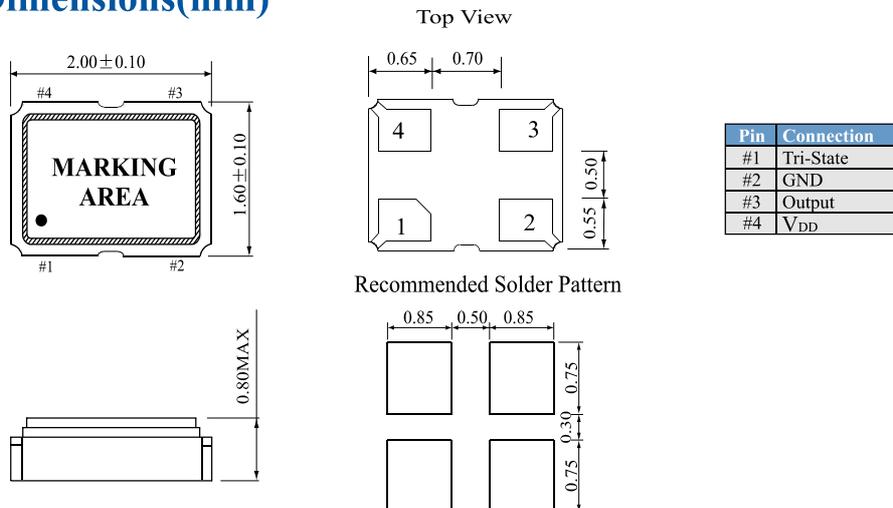

**Note: 0.01uF bypass capacitor should be placed between V_{DD}(Pin4) and GND(Pin2) to Minimize power supply line noise

TAIWAN:

HOSONIC ELECTRONIC CO., LTD.
23-1 LANE 84. CHUN YING ST. SHULIN CHEN.
TAIPEI 23804. TAIWAN
WEB SITE:<http://www.hosonic.com>

☎ : 886-2-86875200
☎ : 886-2-26816456
✉ : hosonic.sales@hosonic.com

CHINA:

HANGZHOU HOSONIC ELECTRONIC CO., LTD.
NO.242 LIANGBO ROAD. LIANGZHU TOWN.
YUHANG DISTRICT, HANGZHOU, ZHEJIANG, CHINA
WEB SITE:<http://www.hosonic.com>

☎ : 86-571-88778189
☎ : 86-571-88778857
✉ : hosonic.sales@hosonic.com

Specifications are subject to change without notice